

Spraybooth(basic model)



Quote Date: 2017/8/18

Valid Before: 2017/9/17

Item Number	EE-7501
Price Term	FOB Shenzhen
Unit Price	US\$6,776.00
Remarks	
Standard Color	Red, Blue, Grey white and Orange
Payment Term	50% prepayment, the balanced payment effected against the BL copy or L/C at sight
Brand	EVERET
Lead Time	20-30 days after receiving prepayment


Specifications

External size(m)	7.0X5.3X3.5(LXWXH)
Internal size	6.9X3.9X2.7m(LXWXH)
Air return style	Full down draft,basement high 325mm
Front door structure	3 folded without frame
Safe door	1 piece in the side wall,800X2000mm
Wall panel material	EPS(Expanded polystyrene) 50mm,wall panel side with metal covered
Steel thickness	0.326mm
Top light	8X4X18W LED light
Side light	None
Intake fan	1X7.5KW
Exhaust fan	None
Total powe	9.5KW
Generator frame	Iron frame with aluminum angle
Heat exchanger	1.5mm(stainless steel made),rear duct
Damper	Automatic pneumatic circular damper
Buner	Italian Riello G20
Exhaust duct	4M straight ducts,2pcs of elbows
Control Box	Chinese components,Motor direct start,overload,overheat,phase-lacking protected
filter	imported
filter installed	hingle installed,mounted above support frame
Floor	3 rows of veins plate,2 rows of grids
Ramp	2 pcs of veins plates style ramps
Enviromental system	No
Fan capacity	24000m3/h
Air velocity	0.25-0.35m/s
Max drying temperature	60°C-80°C
Motor Voltage	380V/50HZ/3PH((If you need other power supply, we will add some cost for each blower)

Main Features

- 1.wall panel cover by steel belt,improve the rigidity of cabin
- 2.good tightness and more convient installation way,hinge filter support frame
- 3.centrifugal fan,convenient to clean up,table property,higher security
- 4.the damper of painting/baking function is switched by cylinder driver
- 5.optional full grids
- 6.optional infrared light for partial baking
- 7.optional rock wool wall panel
- 8.optional 0.426mm thickness color steel
- 9.optional side exhaust
- 10.optional Riello RG55 diesel burner or gas burner.
- 11.optional environmental protection facility
- 12.optional water-soluble painting

Foundation drawing

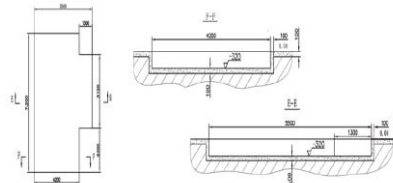

Details Display



filter frame



grids



wall panel side with metal covered



Centrifugal fan



Damper operator



pre-filter



thermoteter&timer



Burner



heat exchanger




panel corner covered by cardboard corner



press lock



control box



optional side exhaust



optional enviroment protection device



optional water painting compliant